


DORS-415S

Outdoor Power Cabinet with Battery Shelf
-54.0VDC / 15A Output

Product Features:

- Wall or Pole Mount Type
- Battery Charger and Monitor
- Full Featured Status and Alarms
- LED Alarm Indicators
- Convection Cooling Type (no fan)

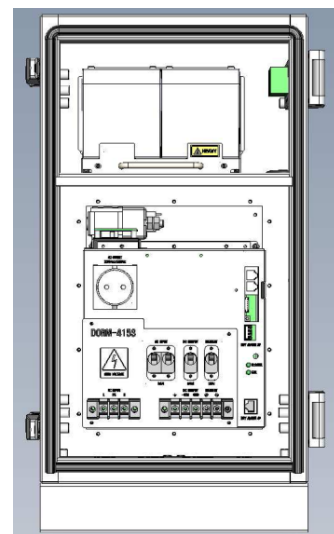

Input Specifications:

VOLTAGE	1Ø220VAC (±20%)
FREQUENCY	57-63Hz
INRUSH	30A @ 220AVC(Max Cold Start)
CURRENT	5.5A @ 220VAC(Max Continuous)
PROTECTION	Double pole 10A Fuse / 250VAC
LEAKAGE	3.0mA Max @ 220VAC
EFFICIENCY	90% Typical
HARMONICS	EN61000-3-2 Class D Compliant (>98PF)
PROTECTION	Input Under voltage, Overvoltage

Output Specifications:

Vout	-54.0VDC
Iout	15Amax
ADJUSTMENT RANGE	-42VDC~-57VDC
LINE REGULATION	±1.0% Max over entire input range
LOAD REGULATION	±1.0% Maximum
TEMP REGULATION	±1.0% Maximum
RIPPLE	≤ 250mVp-p(10Hz~14MHz)
SETPOINT ACCURACY	±1.0%
OVER CURRENT	105~130%
OVER VOLTAGE	-58VDC(recycle input to reset)
PROTECTION	Battery Temp. Compensation Battery Over Discharge

Status & Control signals:

DC OK	High Signal indicates DC Output is on and within regulation
INTERFACE	Dry Contact(4Ports) : Normal Open

General Specifications:

OPERATING TEMP	-30°C to +50°C
STORAGE TEMP	-40°C to +75°C
OPERATING HUMIDITY	10% to 90% (Non-Condensing)
STORAGE HUMIDITY	5% to 95% (Non-Condensing)
COOLING	Convection cooling
RELIABILITY	100,000 Hrs MTBF
ALTITUDE	2,000Meter
SIZE(W×D×H)	260 × 220 × 680mm

Electromagnetic Compatibility:

EMISSIONS	EN55022 Level A (Conducted)
ELECTROSTATIC DISCHARGE	EN61000-4-2, 4KV Contact / 8KV Air
RADIATED SUSCEPTIBILITY	EN61000-4-3, 26-1000MHz, 10V/M, 80%AM
EFT/BURSTS	EN61000-4-4, 2KV
SURGE	EN61000-4-5
CONDUCTED IMMUNITY	EN61000-4-6, 0.15-800MHz, 10V 80%
VOLTAGE DIPS	EN61000-4-10, 95% Dip&10ms, 30% Dip&500ms
VOLTAGE INTERRUPTIONS	EN61000-4-11, 95% reduction, 5ms
FLUCTUATIONS & FLICKER	EN61000-3-3

Standards: TBD

UL/CUL	60950-1
--------	---------

Approvals

KC	KN22/24
----	---------