

Product Features:

- Hot pluggable
- n+1 Redundancy
- Automatic battery charging
- Controlled, measured and reported by GUI, TCP/IP
- Modular design for accommodating high power applications
- Low voltage disconnect for the battery protection (BLVD)



Input Specifications:

VOLTAGE	1P3W 240VAC (Nominal 176~275Vac) 3Ø 4W 380VAC
FREQUENCY	45-66Hz
PROTECTION	Under & Over voltage
EFFICIENCY	96.0% Max (3kW module) 96.0% Typical (2kW module)

Output Specifications:

OUTPUT VOLTAGE	Default -53.5VDC
OUTPUT CURRENT	6KWatt Max (2KWx3 modules) 9KWatt Max (3KWx3 modules)
ADJUSTMENT RANGE	-42VDC~-58VDC
LINE REGULATION	±0.5% Max
LOAD REGULATION	±1.0% Max
TEMP REGULATION	±0.5% Max
NOISE	≤ 300mVp-p
SETPOINT ACCURACY	±0.5%
OVER CURRENT PROTECTION	101~110% -59VDC over Thermal Shutdown Battery Temp. Compensation

Status & Control signal:

COMMUNICATION-INTERFACE	RS232, TCP/IP Digital In&Output Alarm(6ports)
-------------------------	--

General Specifications:

OPERATING TEMP (Derating above)	-40℃ to +75℃ (3KW: +45℃ / 2KW: +55℃)
STORAGE TEMP	-40℃ ~ +85℃
OPERATING HUMIDITY	5% ~ 90%(Non-Condensing)
STORAGE HUMIDITY	0% ~ 95%(Non-Condensing)
COOLING	Fan cooling
ALTITUDE	2,000Meter
SIZE (W×D×H)	448.8mm X 402.0mm X 88.8mm (Shelf)

Electromagnetic Compatibility: (TBD)

EMISSIONS	EN61204/EN55022 Class A
HARMONIC CURRENT - EMISSIONS	EN61000-3-2
FLUCTUATIONS & FLICKER	EN61000-3-3
ELECTROSTATIC-DISCHARGE	EN61000-4-2
RADIATED EMI	EN61000-4-3
EFT/BURSTS	EN61000-4-4
SURGE TRANSIENTS	EN61000-4-5
CONDUCTED IMMUNITY	EN61000-4-6
VOLTAGE DIPS AND - SHORT INTERRUPTIONS	EN61000-4-11

Standards & Approvals: (TBD)

UL/CUL	60950-1
--------	---------

NESPACE-48/3K

(3KW Rectifier Module)

the
POWER
you need

High Efficiency Rectifier Module

NESPACE-48/3K

Rectifier Module
54VDC / 3000W

Product Features:

- Modular Design
- 1U Rack Mountable
- World Wide Safety Approval
- DSP Controller
- LED alarm indicated
- Hot pluggable
- Energy saving operation



Input Specifications:

VOLTAGE	1 ϕ 240VAC (85VAC ~ 297VAC) (Nominal 176~275Vac)
FREQUENCY	45-66Hz
INRUSH CURRENT	25A @ 240AVC
PROTECTION	Mains fuse in both lines
LEAKAGE	3.5mA Max @ 240VAC
EFFICIENCY	96.0% Max
POWER FACTOR	> 0.98 at 50% load or more
PROTECTION	Input Under voltage, Overvoltage

General Specifications:

OPERATING TEMP	-40 °C to +75 °C, (Derating above +45 °C)
STORAGE TEMP	-40 °C to +85 °C
OPERATING HUMIDITY	0% to 95% (Non-Condensing)
STORAGE HUMIDITY	5% to 95% (Non-Condensing)
COOLING	Controlled Fan in a module
ACOUSTIC NOISE	≤58dBA at nominal input and full load
RELIABILITY	>350,000 Hrs MTBF (Ambient : 25°C)
SIZE (W×D×H)	108mm × 340mm × 44mm

Output Specifications:

VOLTAGE	54.0VDC
CURRENT	55.5A (Max 3KW)
ADJUSTMENT RANGE	42.0~58.0VDC
LINE REGULATION	±0.5% Max over entire input range
LOAD REGULATION	±0.5% Maximum
TEMP REGULATION	±0.5% Maximum
Overall REGULATION	±5.0% Maximum
RIPPLE	≤ 300mVp-p(3KW)
SETPOINT ACCURACY	±0.5%
OVER VOLTAGE PROTECTION	59VDC (recycle input to reset) Power derated, Thermal Shutdown

Electromagnetic Compatibility:

EMISSIONS	EN55022 Level A (Conducted)
ELECTROSTATIC DISCHARGE	EN61000-4-2, 4KV Contact / 8KV Air
RADIATED SUSCEPTIBILITY	EN61000-4-3, 26-1000MHz, 10V/M, 80%AM
EFT/BURSTS	EN61000-4-4, 2KV
SURGE	EN61000-4-5
CONDUCTED IMMUNITY	EN61000-4-6, 0.15-800MHz, 10V 80%
VOLTAGE DIPS	EN61000-4-10, 95% Dip&10ms, 30% Dip&500ms
VOLTAGE INTERRUPTIONS	EN61000-4-11, 95% reduction, 5ms
FLUCTUATIONS & FLICKER	EN61000-3-3


Status & Control signals:

COMMUNICATION	CAN
---------------	-----

Standards & Approvals:


UL, CE, CB

AC Input:

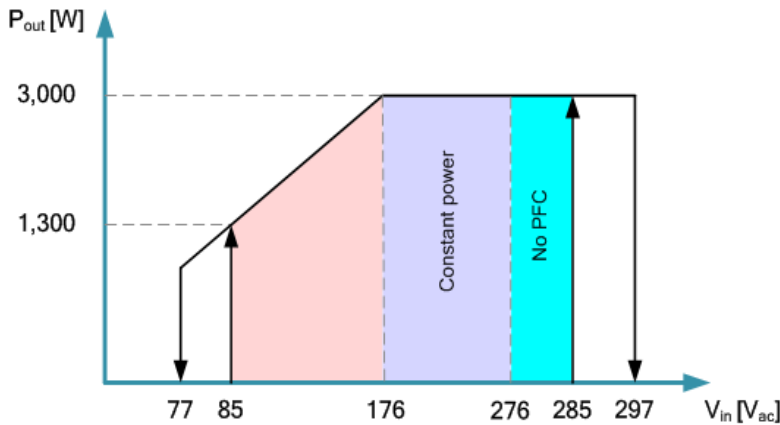


- Voltage range : 85Vac ~ 297Vac
- Constant power range (Max 3KW) : 176Vac~ 297Vac
- Shut-down. Voltage
 - OVP : 297Vac (recovery 285Vac)
 - UVP : 77Vac (recovery 85Vac)

DC Output:

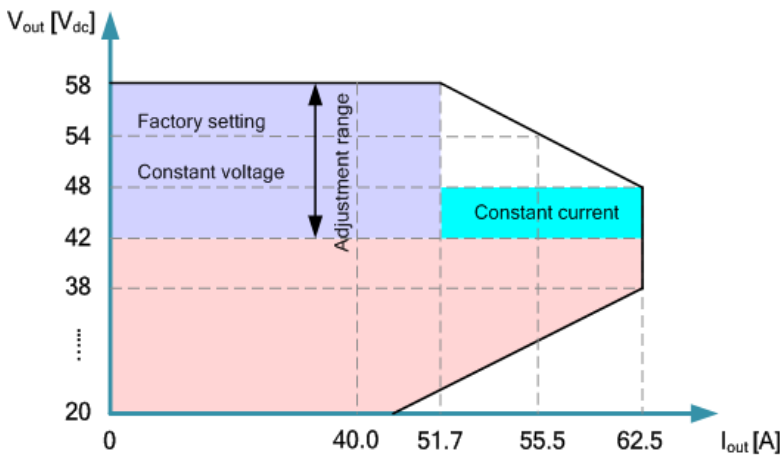

- Voltage range : -42.0Vdc ~ -58.0Vdc
- Constant power range (Max 3KW) : -48.0Vdc ~ -54.0Vdc

Temperature:

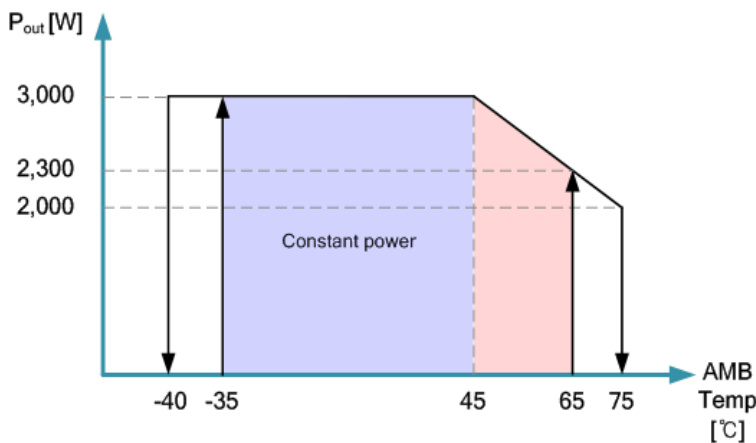

- Operating temperature : -40°C ~ 75°C
- Constant power range (Max 3KW) : -40°C ~ 45°C
- Shut-down. Temperature (Tolerance: ±5°C)
 - : 75°C (recovery 65°C)
 - : -40°C (recovery -35°C)



NESPACE-48/2K

(2KW Rectifier Module)

the
POWER
you need

High Efficiency Rectifier Module

NESPACE-48/2K

Rectifier Module
54VDC / 2000W

Product Features:

- Modular Design
- 1U Rack Mountable
- World Wide Safety Approval
- DSP Controller
- LED alarm indicated
- Hot pluggable
- Energy saving operation



Input Specifications:

VOLTAGE	1Ø240VAC (85VAC ~ 297VAC) (Nominal 176~275Vac)
FREQUENCY	45-66Hz
INRUSH CURRENT	25A @ 240VAC
PROTECTION	Mains fuse in both lines
LEAKAGE	3.5mA Max @ 240VAC
EFFICIENCY	96% Typical
POWER FACTOR	> 0.98at 50% load or more
PROTECTION	Input Under voltage, Overvoltage

General Specifications:

OPERATING TEMP	-40 °C to +75 °C, (Derating above +55 °C)
STORAGE TEMP	-40 °C to +85 °C
OPERATING HUMIDITY	0% to 95% (Non-Condensing)
STORAGE HUMIDITY	5% to 95% (Non-Condensing)
COOLING	Controlled Fan in a module
ACOUSTIC NOISE	≤55dBA at nominal input and full load
RELIABILITY	>350,000 Hrs MTBF (Ambient : 25°C)
SIZE (W×D×H)	108mm × 340mm × 44mm

Output Specifications:

VOLTAGE	54.0VDC
CURRENT	37A (Max 2KW)
ADJUSTMENT RANGE	42.0~58.0VDC
LINE REGULATION	±0.5% Max over entire input range
LOAD REGULATION	±0.5% Maximum
TEMP REGULATION	±0.5% Maximum
Overall REGULATION	±5.0% Maximum
RIPPLE	≤ 250mVp-p(2KW)
SETPOINT ACCURACY	±0.5%
OVER VOLTAGE PROTECTION	59VDC (recycle input to reset) Power derated, Thermal Shutdown

Electromagnetic Compatibility:

EMISSIONS	EN55022 Level A (Conducted)
ELECTROSTATIC DISCHARGE	EN61000-4-2, 4KV Contact / 8KV Air
RADIATED SUSCEPTIBILITY	EN61000-4-3, 26-1000MHz, 10V/M, 80%AM
EFT/BURSTS	EN61000-4-4, 2KV
SURGE	EN61000-4-5
CONDUCTED IMMUNITY	EN61000-4-6, 0.15-800MHz, 10V 80%
VOLTAGE DIPS	EN61000-4-10, 95% Dip&10ms, 30% Dip&500ms
VOLTAGE INTERRUPTIONS	EN61000-4-11, 95% reduction, 5ms
FLUCTUATIONS & FLICKER	EN61000-3-3


Status & Control signals:

COMMUNICATION	CAN
---------------	-----

Standards & Approvals:


UL, CE, CB

AC Input:

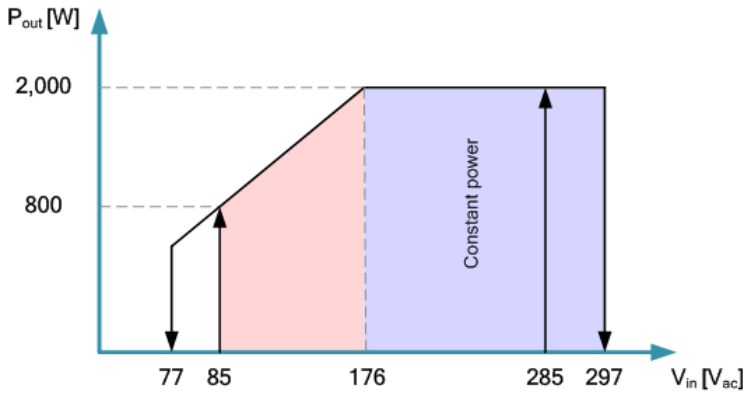


- Voltage range : 85Vac ~ 297Vac
- Constant power range (Max 2KW) : 176Vac~ 297Vac
- Shut-down. Voltage
 - OVP : 297Vac (recovery 285Vac)
 - UVP : 77Vac (recovery 85Vac)

DC Output:

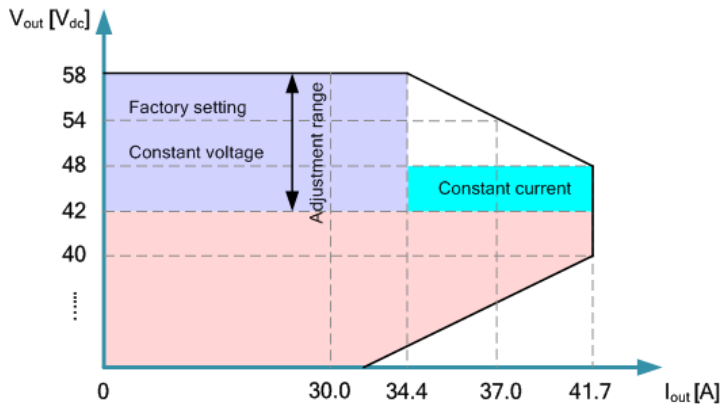

- Voltage range : -42.0Vdc ~ -58.0Vdc
- Constant power range (Max 2KW) : -48.0Vdc ~ -54.0Vdc

Temperature:

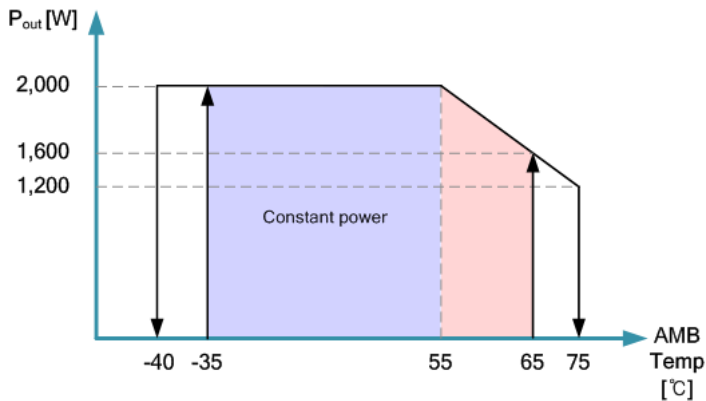

- Operating temperature : -40°C ~ 75°C
- Constant power range (Max 2KW) : -40°C ~ 55°C
- Shut-down. Temperature (Tolerance: ±5°C)
 - : 75°C (recovery 65°C)
 - : -40°C (recovery -35°C)

Product Features :

- RS 232 interface for PC connection, TCP/IP, SNMP V1, SNMP V2C
- Adjustable Output Voltage
- AC Input High/Low Voltage Alarm

Display :

- Status of the rectifier system is displayed on the LCD :
 - Output voltage/Input voltage
 - Output load current
 - Rectifier Temperature
 - Rectifier system setup value and alarms
 - Display output currents for individual rectifier modules

Analog Measurements (Tolerance : Full Scale $\pm 0.5\%$) :

- Rectifier input AC voltage
- Rectifier output DC voltage
- Rectifier load current
- Rectifier temperature

Controller Unit Function :

- Failure of the rectifier controller shall not affect the operation of the rectifiers in the system
- Store and display 1,000 event alarm logs & 1,000 data logs
- †Digital Input Alarm (User Defined alarms)
- †Dry Contact Alarm (User Defined alarms)

† : The number of alarm can vary depending on the shelf

Battery Managements :

- Battery charge/discharge current/the battery set and the total output/
Battery Temperature Display and Measurement
- Manual/Float/Equal charging mode exchangeable
- Battery Charging Current Limiting
- Temperature Compensated Charge Voltage for increased battery Lifetime
- Setting of Battery Temperature Compensation Curve




CPU :

- Coretex-M4 Core
- CPU Clock – Up to 150MHz
- 32ch DMA, 16KB cache, DSP, floating-point unit
- Memory : Flash 1MB / RAM128KB / EEPROM / Flax RAM, Flax NVM
- Ethernet, UART, RS485
- Support RTOS

Interface :


- RS232
 - Baud Rate : 115,200 bps
 - Data Bits : 8Bit / Stop Bits : 1Bit / Parity Bits : N
- LAN
 - Hardwired TCP/IP protocol(TCP/UDP/ICMP/Ethernet)
 - 10BaseT/100BaseTX Ethernet MAC/PHY Embedded
 - Auto Negotiation(Full and half duplex, 10/100-Based)
 - Auto MDI/MDIX(Straight-through or Crossover)

Block Diagram

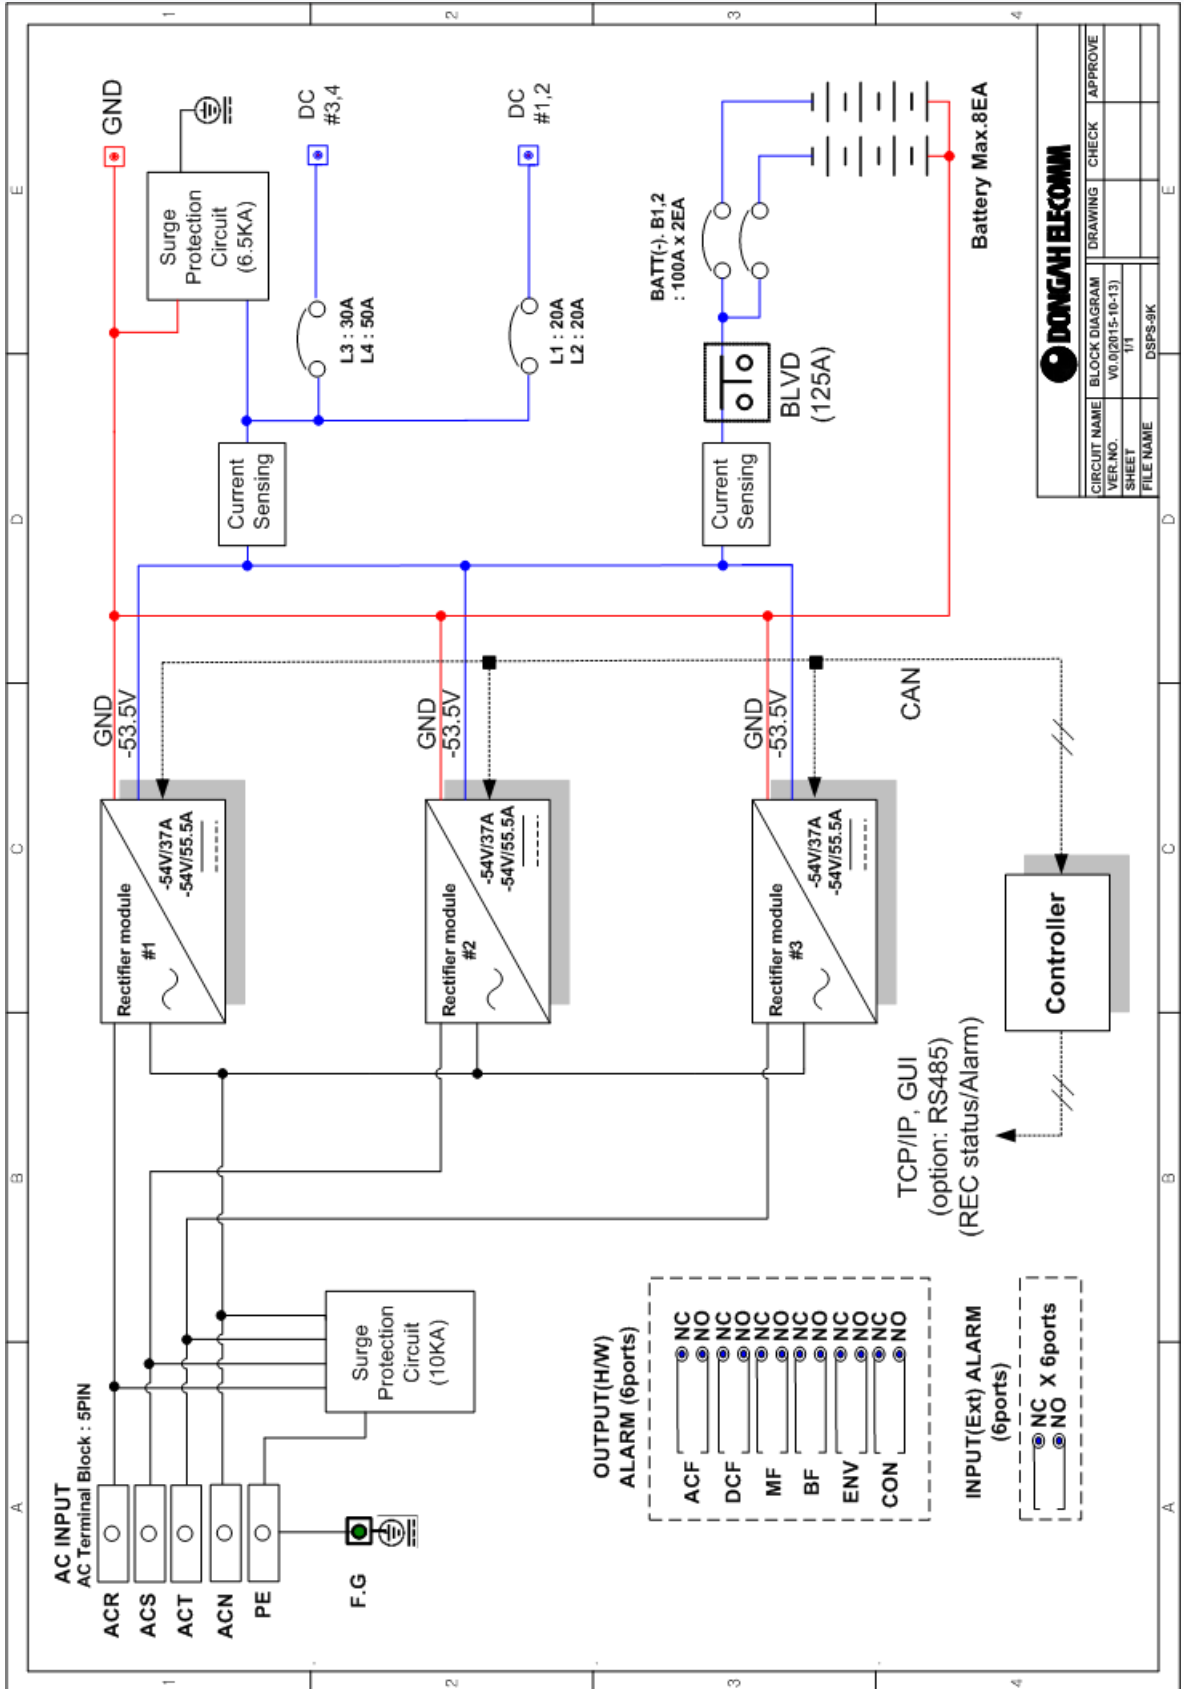


DONGAH ELECOMM	
CIRCUIT NAME	BLOCK DIAGRAM
VER. NO.	V0.0(2015-10-13)
SHEET	1/1
FILE NAME	DSPS-9K
DRAWING	CHECK
APPROVE	

Front View:

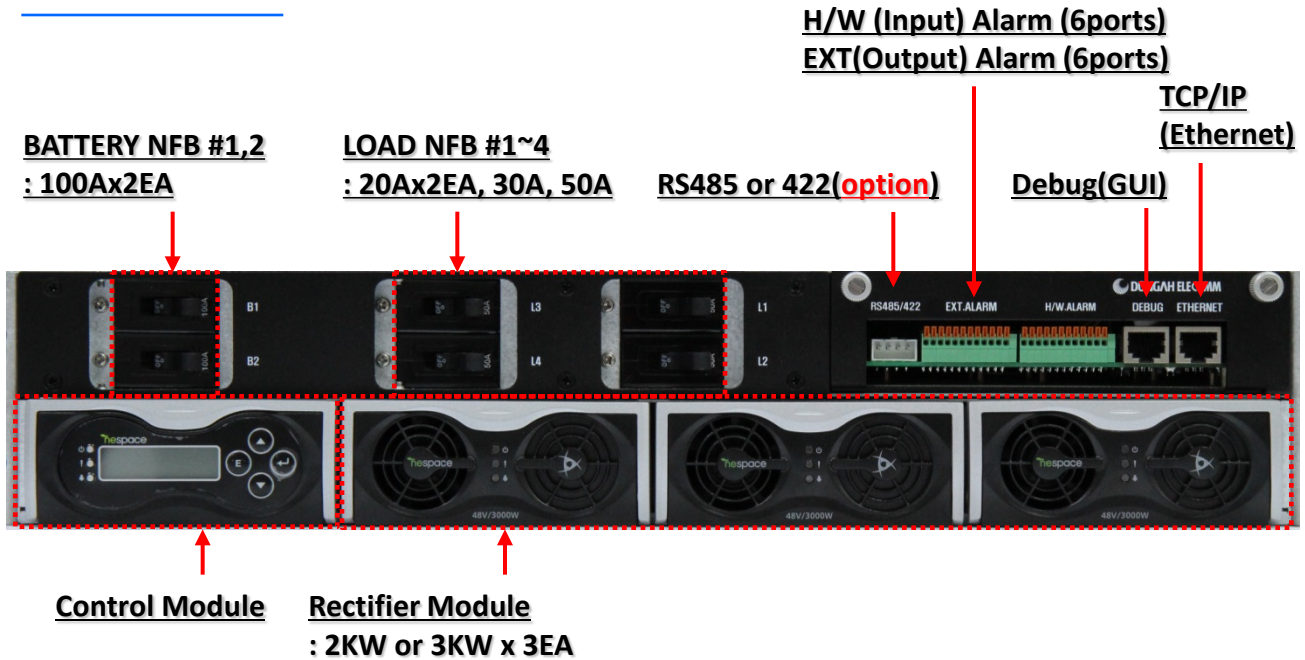

Rear View:

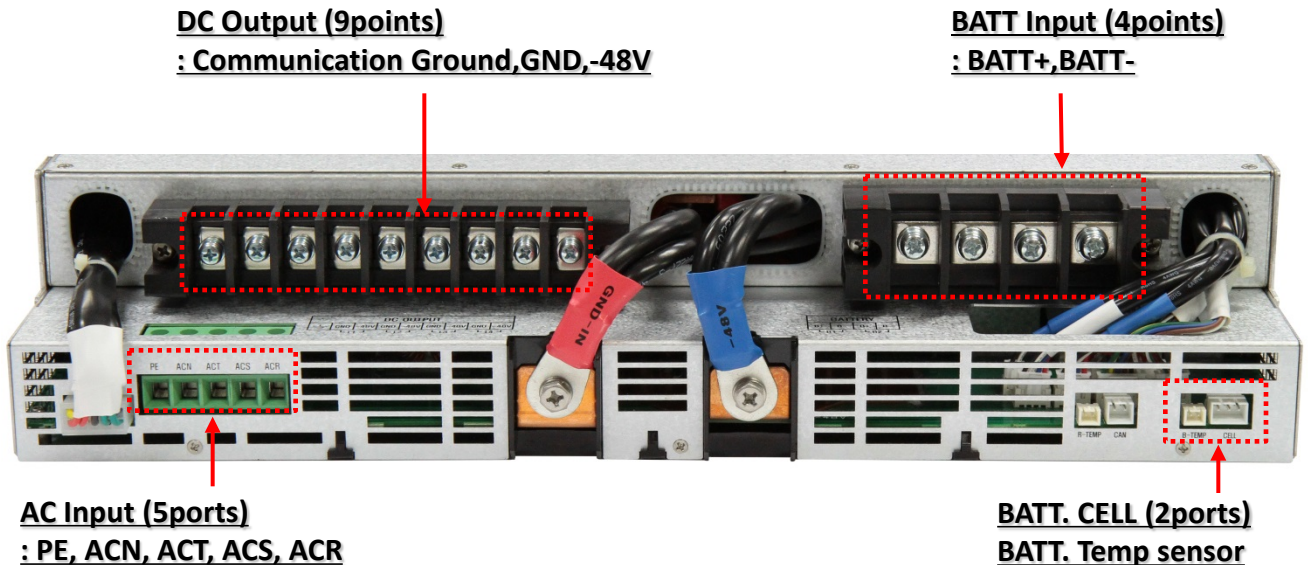

- DC & BATT Distribution
- : The capacity of the changeable